

TIBTRONIX TECHNOLOGY CO., LTD.



# TSPL1GC0D-XX

---

1.25Gb/s 120km CWDM SFP Transceiver  
Hot Pluggable, Duplex LC, +3.3V, 1270nm~1610nm, CWDM DFB, Single-mode, DDM

2015/3/9



Shenzhen Tibtronix Technology Co., Ltd.

3/F, 12th Building, Nangang 1st Industrial Park, Baimang Xili, Songbai Road, Nanshan District, Shenzhen, China

Tel: +86 755 23316583

Fax: +86 755 29810056

E-mail: [sales@tibtronix.com](mailto:sales@tibtronix.com)

<http://www.tibtronix.com>

## Features:

- ✧ Data-rate of 1.25Gbps operation
- ✧ 18-Wavelength CWDM DFB LD Transmitter from
- ✧ 1270nm to 1610nm, with Step 20nm
- ✧ Compliant with SFP MSA and SFF-8472
- ✧ Compatible with SONET OC-24-LR-1
- ✧ Compatible with RoHS
- ✧ +3.3V single power supply
- ✧ Hot-Pluggable SFP Footprint Duplex LC
- ✧ Operating case temperature
  - Standard : 0°C to +70°C
  - Extended: -20°C to +85°C
  - Industrial: -40°C to +85°C

## Applications:

- ✧ Gigabit Ethernet
- ✧ Fiber Channel Switch Infrastructure
- ✧ Router/Server interface
- ✧ Other optical transmission systems

## Description:

The **TSPL1GC0D-xx** series single mode transceiver is small form factor pluggable module for duplex optical data communications such as Gigabit Ethernet 1000BASE-ZX and Fiber Channel 1x SM-LC-L FC-PI. It is with the SFP 20-pin connector to allow hot plug capability. This module is designed for single mode fiber and operates at a nominal wavelength of CWDM wavelength. There are eighteen center wavelengths available from 1270nm to 1610nm, with each step 20nm.

The transmitter section uses a multiple quantum well CWDM DFB laser and is a class 1 laser compliant according to International Safety Standard IEC-60825. The receiver section uses an

integrated InGaAs detector preamplifier (IDP) mounted in an optical header and a limiting post-amplifier IC. The **TSPL1GC0D-xx** series are designed to be compliant with SFF-8472.

### ● Absolute Maximum Ratings

Parameter	Symbol	Min.	Typical	Max.	Unit
Storage Temperature	$T_S$	-40		+85	°C
Supply Voltage	$V_{CC}$	-0.5		3.6	V
Relative Humidity	RH	0		90	%

### ● Recommended Operating Environment:

Parameter	Symbol	Min.	Typical	Max.	Unit
Case operating Temperature	$T_C$	0		+70	°C
Supply Voltage	$V_{CC}$	3.15		3.45	V
Supply Current	$I_{CC}$			300	mA
Data rate	GBE		1.25		Gbps
	FC		1.063		Gbps

### ● Electrical Characteristics( $T_{OP} = 0$ to $70^\circ\text{C}$ , $V_{CC} = 3.135$ to $3.465$ Volts)

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
<b>Transmitter Section:</b>						
Input differential impedance	$R_{in}$	85	100	115	$\Omega$	
Single ended data input swing	$V_{in\ PP}$	400		2000	mVp-p	
Transmit Disable Voltage	$V_D$	2.0		$V_{CC}$	V	
Transmit Enable Voltage	$V_{EN}$	0		0.8	V	
Tx Fault	Fault	$Tx\_f$	2.0		V	
	Normal	$Tx\_n$	0		V	
<b>Receiver Section:</b>						
Single ended data output swing	$V_{out,pp}$	370		1800	mv	
LOS Fault	$V_{losfault}$	2		$V_{CC}$	V	
LOS Normal	$V_{los\ norm}$	0		0.8	V	

## ● Optical Parameters( $T_{OP} = 0$ to $70^{\circ}C$ , $VCC = 3.135$ to $3.465$ Volts)

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
<b>Transmitter Section:</b>						
Center Wavelength	$\lambda_c$	$\lambda-6$	$\lambda$	$\lambda+7.5$	nm	
Spectral Width(-20dB)	$\Delta\lambda$			1	nm	
Side Mode Suppression Ratio	SMSR	30			dB	
Optical Output Power	$P_{out}$	0		+5	dBm	1
Optical Rise/Fall Time	$t_r / t_f$			260	ps	2
Extinction Ratio	ER	8.2			dB	
Eye Mask for Optical Output	Compliant with IEEE802.3z(class 1 laser safety)					
<b>Receiver Section:</b>						
Optical Input Wavelength	$\lambda_c$	1260		1620	nm	
Receiver Overload	$P_{ol}$	-8			dBm	3
RX Sensitivity	Sen			-32	dBm	3
RX_LOS Assert	$LOS_A$	-40			dBm	
RX_LOS De-assert	$LOS_D$			-32	dBm	
RX_LOS Hysteresis	$LOS_H$	0.5			dB	
<b>General Specifications:</b>						
Data Rate	BR		1.063/1.25		Gb/s	
Bit Error Rate	BER			$10^{-12}$		
Max. Supported Link Length on 9/125 $\mu$ m SMF@1.25Gb/s	$L_{MAX}$		120		km	
Total System Budget	LB	24			dB	

### Note

1. The optical power is launched into SMF.
2. 20-80%.
3. Measured with PRBS  $2^{7-1}$  at  $10^{-12}$  BER

## ● Pin Assignment

Diagram of Host Board Connector Block Pin Numbers and Name

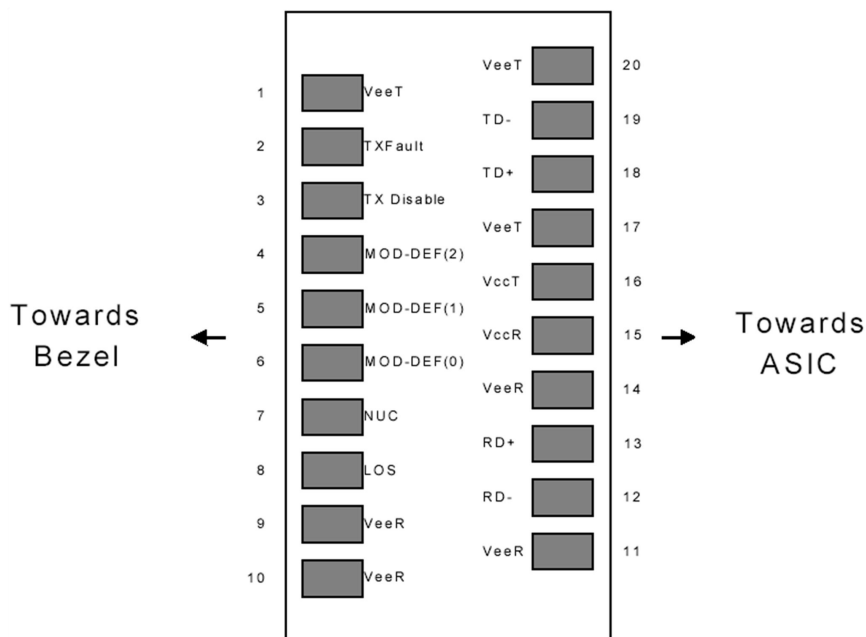


Diagram of Host Board Connector Block Pin Numbers and Names

## ● Pin Function Definitions

Pin No	Name	Function	Plug Seq	Notes
1	VeeT	Transmitter Ground	1	1
2	TX Fault	Transmitter Fault Indication	3	
3	TX Disable	Transmitter Disable	3	2
4	MOD-DEF2	Module Definition	2	3
5	MOD-DEF1	Module Definition 1	3	3
6	MOD-DEF0	Module Definition 0	3	3
7	Rate Select	Not Connected	3	4
8	LOS	Loss of Signal	3	5
9	VeeR	Receiver Ground	1	1
10	VeeR	Receiver Ground	1	1
11	VeeR	Receiver Ground		1
12	RD-	Inv. Received Data Out	3	6
13	RD+	Received Data Out	3	6
14	VeeR	Receiver Ground	3	1
15	VccR	Receiver Power	2	1
16	VccT	Transmitter Power	2	
17	VeeT	Transmitter Ground	1	
18	TD+	Transmit Data In	3	6
19	TD-	Inv. Transmit In	3	6

20	VeeT	Transmitter Ground	1	
----	------	--------------------	---	--


**Notes:**

1. Circuit ground is internally isolated from chassis ground.
2. Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V.
3. Should be pulled up with 4.7k - 10 kohms on host board to a voltage between 2.0V and 3.6V. MOD\_DEF(0) pulls line low to indicate module is plugged in.
4. Rate select is not used
5. LOS is open collector output. Should be pulled up with 4.7k – 10 kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.
6. AC Coupled

● **SFP Module EEPROM Information and Management**

The SFP modules implement the 2-wire serial communication protocol as defined in the SFP -8472. The serial ID information of the SFP modules and Digital Diagnostic Monitor parameters can be accessed through the I<sup>2</sup>C interface at address A0h and A2h. The memory is mapped in Table 1. Detailed ID information (A0h) is listed in Table 2. And the DDM specification at address A2h. For more details of the memory map and byte definitions, please refer to the SFF-8472, “Digital Diagnostic Monitoring Interface for Optical Transceivers”. The DDM parameters have been internally calibrated.

**Table 1.** Digital Diagnostic Memory Map (Specific Data Field Descriptions)

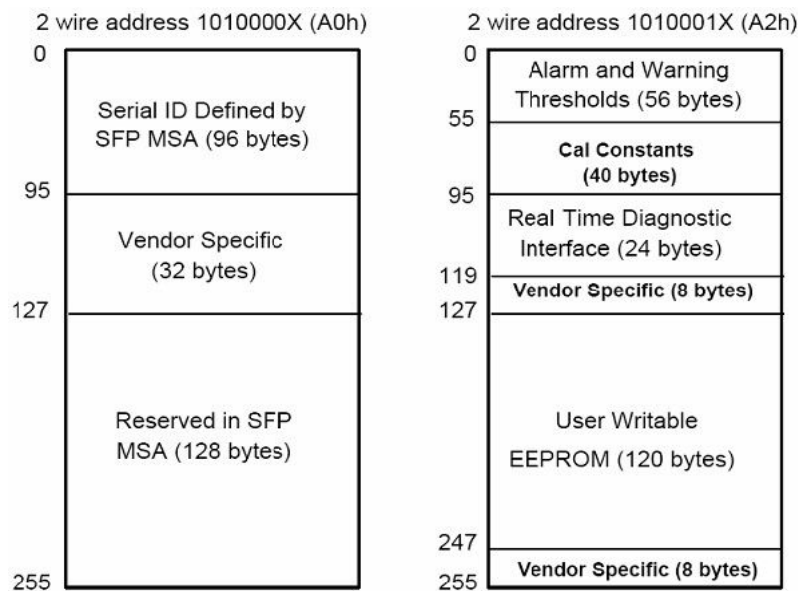

**Table 2 - EEPROM Serial ID Memory Contents (A0h)**

Data Address	Length (Byte)	Name of Length	Description and Contents
Base ID Fields			
0	1	Identifier	Type of Serial transceiver (03h=SFP)

1	1	Reserved	Extended identifier of type serial transceiver (04h)
2	1	Connector	Code of optical connector type (07=LC)
3-10	8	Transceiver	
11	1	Encoding	NRZ(03h)
12	1	BR, Nominal	Nominal baud rate, unit of 100Mbps
13-14	2	Reserved	(0000h)
15	1	Length(9um)	Link length supported for 9/125um fiber, units of 100m
16	1	Length(50um)	Link length supported for 50/125um fiber, units of 10m
17	1	Length(62.5um)	Link length supported for 62.5/125um fiber, units of 10m
18	1	Length(Copper)	Link length supported for copper, units of meters
19	1	Reserved	
20-35	16	Vendor Name	SFP vendor name: FTTX
36	1	Reserved	
37-39	3	Vendor OUI	SFP transceiver vendor OUI ID
40-55	16	Vendor PN	Part Number: "TSPL1GC0D-xx" (ASCII)
56-59	4	Vendor rev	Revision level for part number
60-62	3	Reserved	
63	1	CCID	Least significant byte of sum of data in address 0-62
Extended ID Fields			
64-65	2	Option	Indicates which optical SFP signals are implemented (001Ah = LOS, TX_FAULT, TX_DISABLE all supported)
66	1	BR, max	Upper bit rate margin, units of %
67	1	BR, min	Lower bit rate margin, units of %
68-83	16	Vendor SN	Serial number (ASCII)
84-91	8	Date code	FTTX's Manufacturing date code
92-94	3	Reserved	
95	1	CCEX	Check code for the extended ID Fields (addresses 64 to 94)
Vendor Specific ID Fields			
96-127	32	Readable	FTTX specific date, read only
128-255	128	Reserved	Reserved for SFF-8079

## ● Digital Diagnostic Monitor Characteristics

Data Address	Parameter	Accuracy	Unit
96-97	Transceiver Internal Temperature	±3.0	°C
98-99	VCC3 Internal Supply Voltage	±3.0	%


100-101	Laser Bias Current	$\pm 10$	%
102-103	Tx Output Power	$\pm 3.0$	dBm
104-105	Rx Input Power	$\pm 3.0$	dBm

## ● Regulatory Compliance

The **TSPL1GC0D-xx** complies with international Electromagnetic Compatibility (EMC) and international safety requirements and standards (see details in Table following).

Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883E Method 3015.7	Class 1(>1000 V)
Electrostatic Discharge (ESD) to the Duplex LC Receptacle	IEC 61000-4-2 GR-1089-CORE	Compatible with standards
Electromagnetic Interference (EMI)	FCC Part 15 Class B EN55022 Class B (CISPR 22B) VCCI Class B	Compatible with standards
Laser Eye Safety	FDA 21CFR 1040.10 and 1040.11 EN60950, EN (IEC) 60825-1,2	Compatible with Class 1 laser product.

## ● Recommended Circuit

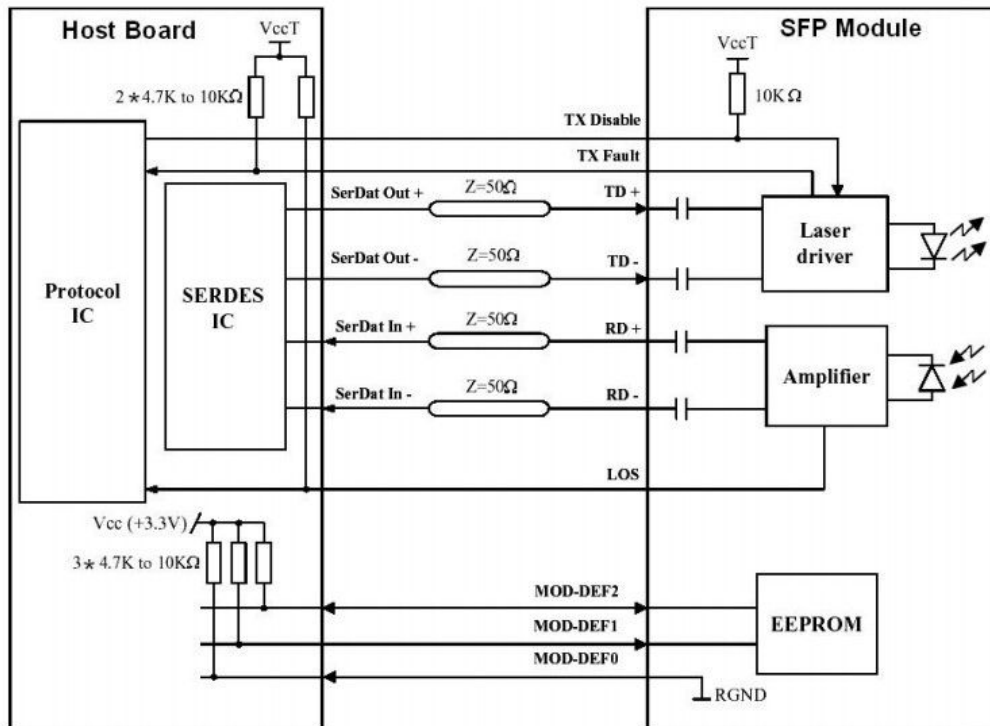


SFP Host Recommended Circuit



---

- **Mechanical Dimensions**

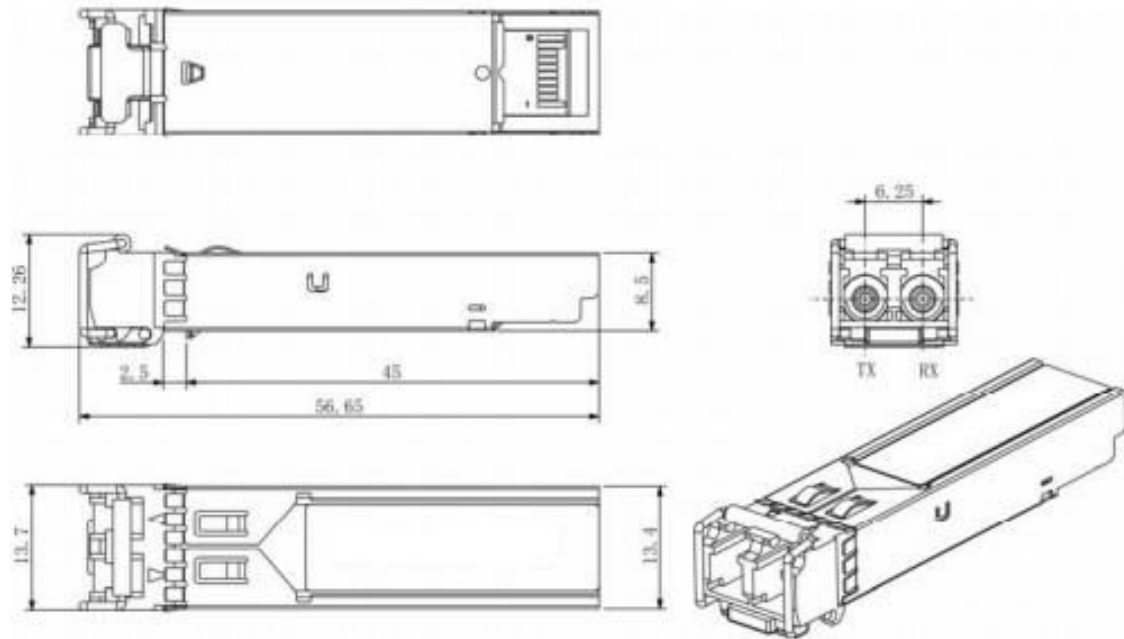

**Mechanical Drawing**

- **Order Information:**

In the Part No. of TSPL1GC0D-xx, xx stands for central wavelength, such as:

27: for 1270nm, 29: for 1290nm, 31: for 1310nm,..... 61: for 1610nm.